

Gamme Claviers : Claviers autonomes ou Wiegand

EASYBKA et **EASYBKR** sont des claviers autonomes anti-vandales (mémoire 500 codes).


EASYBKW est un clavier anti-vandale avec sortie données Wiegand / Data Clock.

EASYBKA, **EASYBKR** et **EASYBKW** ont été conçus pour usage en extérieur (IP65).



EASYBKA / EASYBKR :

- ▶ Clavier autonome
- ▶ 1 LED pilotable
- ▶ Anti-vandale IP65, électronique résinée
- ▶ Gestion de 500 utilisateurs
- ▶ Rétro-éclairage bleu (plusieurs modes)
- ▶ 2 sorties relais
- ▶ Tamper optique
- ▶ Chauffage intégré
- ▶ Installation en saillie
- ▶ Sortie par bornier à vis pour **EASYBKR**
- ▶ Câble longueur 2 m pour **EASYBKA**

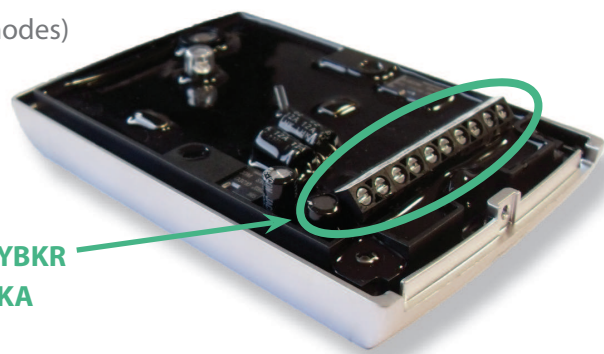

EASYBKW :

- ▶ Sortie données Wiegand / Data Clock
- ▶ Anti-vandale IP65, électronique résinée
- ▶ Rétro-éclairage bleu (plusieurs modes)
- ▶ Câble longueur 2 m
- ▶ Installation en saillie

Caractéristiques techniques	EASYBKA EASYBKR	EASYBKW
Alimentation :	12-24 Vcc/ac	12 Vcc
Consommation :	145 mA avec rétro-éclairage	50 mA
	615 mA avec chauffage à 12 Vcc	-
	465 mA avec chauffage à 24 Vcc	-
Nombre de relais :	2	-
Capacité relais :	2A	-
Capacité mémoire :	500 codes (répartition libre sur relais)	-
Entrée principale :	N.O. (bouton ouverture)	-
Entrée auxiliaire :	N.F. / N.O.	-
T° de fonctionnement :	-20°C / +55°C	-20°C / +55°C
Degré de protection :	IP 65	IP 65
Dimensions :	120 x 76 x 21 mm	120 x 76 x 21 mm
Poids :	410 g	410 g

Keypads range :

Stand alone or Wiegand

EASYBKA and **EASYBKR** are both stand alone anti-vandal keypads (memory 500 codes).


EASYBKW is an anti-vandal keypad with Wiegand/ Data Clock data output.

EASYBKA, **EASYBKR** and **EASYBKW** are designed for outdoor use (IP65).



EASYBKA / EASYBKR :

- ▶ Stand alone
- ▶ 1 controllable LED
- ▶ Anti-vandal IP65, resinate electronics
- ▶ 500 users management
- ▶ Blue backlight (various modes)
- ▶ 2 relay outputs
- ▶ Optical tamper
- ▶ Selectable thermal heating
- ▶ Wall-mounted
- ▶ Terminal blocks wiring for **EASYBKR**
- ▶ Cable 2 m length for **EASYBKA**

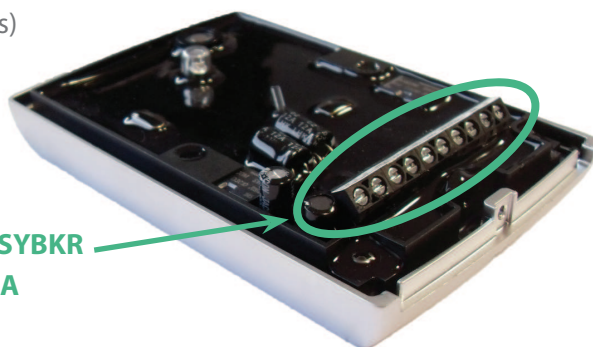

EASYBKW :

- ▶ Data output Wiegand / Data Clock
- ▶ Anti-vandal IP65, resinate electronics
- ▶ Blue backlight (various modes)
- ▶ Cable 2 m length
- ▶ Wall-mounted

Technical specifications	EASYBKA EASYBKR	EASYBKW
Power supply :	12-24 Vac/dc	12 Vcc
Consumption :	145 mA with backlight	50 mA
	615 mA with heating 12 Vdc	-
	465 mA with heating 24 Vdc	-
Relay outputs :	2	-
Relay capacity :	2A	-
Memory capacity :	500 codes (freely allocable on relays)	-
Main input :	N.O. (opening button)	-
Auxiliary input :	N.C. / N.O.	-
Operating T° :	-20°C / +55°C	-20°C / +55°C
Protection rating :	IP 65	IP 65
Dimensions :	120 x 76 x 21 mm	120 x 76 x 21 mm
Weight :	410 g	410 g



ZI Athélie II, 225 imp. du Serpolet
13704 La Ciotat Cedex - France
Tel : +33 442 98 06 06
Fax : +33 442 04 53 51
Email : info@prastel.com
www.prastel.com

Legal statements: PRASTEL is a trademark of PRASTEL France SARL. All trademarks mentioned in this document are property of their respective owners. This document is the exclusive property of PRASTEL. PRASTEL reserves the right to stop any product or service for any reason and without any liability. Non contractual photographs.

